

High performance LCD projector captures attention in classrooms or conference rooms with dynamic images and 2,700 ANSI lumens.



## Key Features

- XGA 1024 x 768 resolution
- 2,700 ANSI lumens white/color output
- 16 watt audio output
- 10000:1 contrast ratio
- HDMI 2 inputs
- 5,000 hours unwoven filter\*
- 10,000 hours lamp life (Eco-2 mode)\*\*
- HDCR/Accentualizer

From the classroom to the conference room, Hitachi's CP-X2541WN LCD projector combines superior image clarity, high quality value, and long-life reliability. Bright, vivid colors with razor-sharp text and bold graphics will truly enhance any lesson or meeting and make it more memorable. For greater installation convenience, the CP-X2541WN has a cloning function which enables you to copy configuration settings from one projector to others of the same model via USB memory. The CP-X2541WN also includes our iOS application Projector Quick Connection App which offers simple control options including sending photo and document files and web site contents to the projector. Plus, Hitachi's Intelligent Eco Mode with ImageCare combines optimal picture performance with maximum energy savings for a lower total cost of ownership. For added peace of mind, Hitachi's CP-X2541WN is also backed by a generous warranty and our world-class service and support programs.

# CP-X2541WN

## UNIQUE FEATURES

### Accentualizer

Hitachi original technology makes pictures look more real by enhancing sharpness, gloss and shade to make pictures as clear as pictures on a flat-panel device. You can also adjust the effects by three levels according to your surroundings so that the colors of projected images are the actual colors of the objects they represent.



### HDCR (High Dynamic Contrast Range)

When average projectors are used in bright rooms, the darker colors of an image deteriorate and images become unclear. Using this function, blurred images caused by room lighting or outside light sources are corrected, and an effect similar to increasing contrast occurs. This results in clear images even in bright rooms.



### Cloning Function

Copy configuration settings from one projector to others of the same model via USB memory. Cloning can save almost all PJ settings such as gamma and keystone via USB memory.



### ImageCare Technology

ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.



### Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp according to the brightness level of the screen. Also, automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, these features give optimal picture performance with maximum energy savings.

### Perfect Fit 2



Enables the user to adjust individual corners and sides independent of one another. Perfect Fit 2 provides vertical and horizontal digital correction of either barrel or pin cushion distortions. This feature helps correct geometric and complicated distortions. Perfect Fit 2 makes the projected image to fit correctly to the screen quickly and easily.

### Projector Quick Connection App For Mobile Devices



Our iOS application offers full projector control and also provides the capability to display photos, document files and web site contents. Available for iPad®, iPhone® and Android devices. Works over your LAN via your RJ-45 port or via an optional USBWL11N wireless adapter.

### Wired and Wireless Switcher Solutions



Multifunctional switcher operates in conjunction with the receiver to provide expanded source selection and switching options for connected devices. The switcher is sold as an optional accessory that can provide 1080p 30 fps wireless via WHDI for both video and audio.

HI0402-06/15


All specifications subject to change without notice.  
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.  
©2015 Hitachi America, Ltd. All Rights Reserved.

### Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)  
Web: [hitachi-america.us/projectors](http://hitachi-america.us/projectors)  
Blog: [dmd.hitachi-america.us/blog](http://dmd.hitachi-america.us/blog)

## STANDARD FEATURES

### Input Source Naming



Users can rename input sources in more descriptive terms instead of the factory default names.

### Microphone Input



A microphone can be used via the jack located on the input panel. Allows for more dynamic presentations even in standby mode.

### Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.

### PC-Less Presentation



By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. There is also a slideshow function. This feature also supports the following file types: JPG, PNG, BMP, GIF, AVI, and MOV — frame rate is under 12fps 640 x 480.

### PIN Lock / MyScreen / MyText



PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.

### PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.

### Present Content via LAN



Hitachi's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.

### Serial Number and Media Access Control Label



A label is affixed to side of projector to more easily access and read the model name, serial number and MAC address while mounted in ceiling use. This is a convenience for installers, end users and auditors for instant accessibility.

### Wireless Presentation Compatible



Connect the projector to a computer or your network using the optional USB wireless adapter (part number USBWL11N). The adapter supports IEEE802.11n.

\* Actual filter life will vary by individual filter based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

\*\* Actual lamp life will vary by individual lamp based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.



## Long-life reliability with a lower total cost of ownership.

From classrooms to conference rooms, Hitachi's CP-X2541WN can make a big impact on your audience. With 2,700 ANSI lumens brightness and XGA 1024 x 768 resolution, the CP-X2541WN is designed to make any message more memorable with colorful images, crisp text, and powerfully clear audio.



Incorporating Hitachi's leading-edge technology, the CP-X2541WN features high contrast ratio, long lamp life, cloning function enabling you to copy configuration settings from one projector to others of the same model, and is wireless presentation compatible. Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and e-mail alerts). Even with the the array of advanced features, Hitachi's CP-X2541WN is designed for user-friendly operation and installation convenience.



Front View



Top View




Left Profile




Right Profile


## Input/Outputs

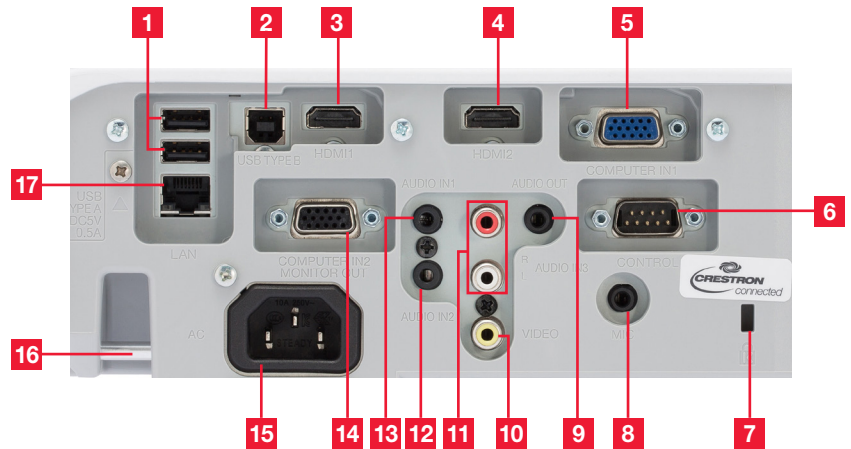

- |                      |                     |                                   |
|----------------------|---------------------|-----------------------------------|
| 1. USB Type A x 2    | 7. Kensington Lock  | 13. Audio in 1                    |
| 2. USB Type B        | 8. Microphone Input | 14. Computer in 2/<br>Monitor Out |
| 3. HDMI1             | 9. Audio Out        | 15. AC                            |
| 4. HDMI2             | 10. Video           | 16. Security Bar                  |
| 5. Computer in 1     | 11. Audio in 3      | 17. LAN                           |
| 6. Control (RS-232C) | 12. Audio in 2      |                                   |



3LCD Technology



Closed Captioning



Crestron Integrated Partner



AMX Device Discovery



Hitachi Trade-Up Program



3 Year Warranty

**HDMI** HDMI

HI0402-06/15  
All specifications subject to change without notice.  
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.  
©2015 Hitachi America, Ltd. All Rights Reserved.

### Hitachi America, Ltd.

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)

Web: [hitachi-america.us/projectors](http://hitachi-america.us/projectors)

Blog: [dmd.hitachi-america.us/blog](http://dmd.hitachi-america.us/blog)

# CP-X2541WN



## Accessories and Lenses

|                             |  |
|-----------------------------|--|
| <b>Supplied Accessories</b> | Remote control, power cord, computer cable, 2 AA batteries, lens cover, adapter cover, security label, application CD, user's manual CD, user's manual |
| <b>Optional Accessories</b> | USBWL11N USB wireless adapter, TB-1 wireless pen tablet  |
| <b>Optional Lenses</b>      | NA   |
| <b>Replacement Parts</b>    |  |
| <b>Lamp</b>                 | DT01481 with filter  |
| <b>Remote Control</b>       | HL03031  |
| <b>Filter</b>               | UX38841  |

## Projection Throw Chart

| Screen Size 4:3 |       | Throw Distance |     |
|-----------------|-------|----------------|-----|
| Diagonal        | Width | Min            | Max |
| 30              | 24    | 34             | 41  |
| 60              | 48    | 70             | 84  |
| 80              | 64    | 94             | 113 |
| 100             | 80    | 118            | 142 |
| 200             | 160   | 237            | 285 |
| 300             | 240   | 357            | 428 |

Throw Ratio: 1.5 - 1.8 : 1 (distance : width)  
Screen size and throw distance are measured in inches.

## Specifications

|                               |   |  |
|-------------------------------|---|--|
| <b>Display</b>                | <b>Projection Technology</b>  | 3LCD, 3 chip technology  |
|                               | <b>Resolution</b>   | XGA - 1024 x 768   |
|                               | <b>White Light Output</b>   | 2,700 ANSI lumens  |
|                               | <b>Color Light Output</b>   | 2,700 ANSI lumens  |
|                               | <b>Colors</b>   | 16.7 million colors  |
|                               | <b>Aspect Ratio</b>   | Native 4:3 and 16:9 / 16:10 compatible   |
|                               | <b>Contrast Ratio</b>   | 10,000 : 1 (using active IRIS)   |
| <b>Lens &amp; Operation</b>   | <b>Throw Ratio</b><br>(distance : width)  | 1.5 - 1.8 : 1  |
|                               | <b>Focus Distance</b>   | 32" - 425"   |
|                               | <b>Display Size</b>   | 30" - 300"   |
|                               | <b>Lens</b>   | F = 1.9 - 2.3, f = 19 - 23 mm, x 1.2 manual zoom   |
|                               | <b>Lamp Wattage</b>   | 225W   |
|                               | <b>Expected Lamp Life*</b>  | Approximately 5,000 hours (standard mode)<br>10,000 hours (Eco-2 mode)                           |
|                               | <b>Expected Filter Life**</b>   | Approximately 5,000 hours  |
| <b>Compatibility</b>          | <b>Speaker Output</b>   | 16W  |
|                               | <b>Keystone</b>   | H and V: +/- 30°   |
|                               | <b>Computer</b>   | VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC 16"                                 |
|                               | <b>H-Sync</b>   | 15 kHz - 106 kHz   |
|                               | <b>V-Sync</b>   | 50 Hz - 120 Hz   |
|                               | <b>Composite Video</b>  | NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM  |
|                               | <b>Component Video</b>  | 480i, 480p, 576i, 720p, 1080i, 1080p   |
| <b>Connectors</b>             | <b>HDMI</b>   | 480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDs Clock 27 MHz - 150 MHz                |
|                               | <b>Digital Input</b>  | HDMI x 2 (HDCP compliant)  |
|                               | <b>Computer Input 1</b>   | 15-pin mini D-sub x 1  |
|                               | <b>Computer Input 2</b>   | 15-pin mini D-sub x 1 (shared with Monitor out)  |
|                               | <b>Computer Monitor Output</b>  | 15-pin mini D-sub x 1 (shared with Computer in 2)  |
|                               | <b>Video Input</b>  |  |
|                               | S-Video   | N/A  |
|                               | Composite Video   | RCA jack x 1   |
|                               | Component Video   | 15-pin mini D-sub x2 (shared with computer in 1, in 2/Monitor out)                               |
|                               | <b>Audio Input</b>  | 3.5mm stereo mini jack x 2, RCA jack (L/R) x 1<br>MIC-in 3.5mm mini jack x 1                     |
|                               | <b>Audio Output</b>   | 3.5mm stereo mini jack x 1   |
|                               | <b>Network LAN Wired</b>  | RJ-45 port   |
|                               | <b>Network LAN Wireless</b>   | USB-A, IEEE802.11 b/g/n - optional wireless adapter required                                     |
| <b>Ratings &amp; Warranty</b> | <b>USB</b>  | Type A x 2 (PC-less presentation, wireless adapter)<br>Type B x 1 (USB display or mouse control) |
|                               | <b>Control Terminals</b>  | 9-pin D-sub x 1 (RS-232 control)   |
|                               | <b>Power Supply</b>   | AC100-120V / AC220-240V, 50/60Hz   |
|                               | <b>Power Consumption</b>  | 330W   |
|                               | <b>Operating Temperature</b>  | 41°F - 95°F (5°C - 35°C)   |
|                               | <b>Dimensions (W x D x H)</b>   | 12.6" x 9.7" x 3.4" (excluding protruding parts)   |
|                               | <b>Weight</b>   | Approximately 6.8 lbs.   |
| <b>Approvals</b>              | UL 60950-1 / cUL FCC Part 15 subpart B class B  |  |
| <b>Warranty</b>               | 3 year limited parts and labor<br>Extended Service Contract available (additional cost) |  |

\* Actual lamp life will vary by individual lamp based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

\*\* Actual filter life will vary by individual filter based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

# CP-X2541WN