

**Breakthrough classroom performance  
with incredible picture quality, high reliability,  
and lower cost of ownership.**



## Key Features

- XGA 1024 x 768 resolution
- 3,000 ANSI lumens light output
- 2500:1 contrast ratio
- 4,500 hours lamp life (Standard mode)  
6,000 hours lamp life (Eco mode)\*
- ImageCare Technology for energy savings
- BrilliantColor™
- Deeper black levels
- Wall color correction
- Filter free design

**1.800.HITACHI**  
**dmd.info@hal.hitachi.com**  
**hitachi-america.us/projectors**



Hitachi's CP-DX300 DLP® projector represents the new standard for classroom environments and versatility with high resolution XGA performance, an innovative feature set and overall value. The CP-DX300 incorporates 3,000 ANSI lumens light output and a 2500 : 1 contrast ratio for vibrant, bold images with deeper black levels and razor-sharp text. Performance versatility is enhanced by HDMI terminals which accommodate many types of AV devices. Plus, Hitachi's Intelligent Eco and Saver Modes with ImageCare combines optimal picture performance with energy savings for a lower cost of ownership. For added peace of mind, Hitachi's CP-DX300 is also backed by a generous warranty and our world-class service and support programs.



*The wireless remote control enables you to easily control a full complement of projector functions.*

# CP-DX300




## SPECIFICATION HIGHLIGHTS

### 3,000 ANSI Lumens Light Output



The light output specification measures the brightness of light output and with 3,000 ANSI lumens the result is bright, clear, true to life images with incredible detail.

### 2500:1 Contrast Ratio



Contrast can be automatically controlled through an active iris to add depth perspective during both bright and dark scenes.

### HDMI Input (HDCP)



Digital connectivity allows for highest image quality from your HD device. Compliancy with HDCP.

### 6,000 Hour Lamp Life (Eco mode)\*



Another key to low total cost of ownership is a long life lamp. The lamp is rated at 4,500 hours in standard mode and 6,000 hours in Eco mode.

### Power Saving Standby Mode



Power saving mode reduces the standby power consumption to less than 0.5W.

## UNIQUE FEATURES

### ImageCare Technology



ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.

### Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp according to the brightness level of the screen. Also, automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, these features give optimal picture performance with maximum energy savings.

## STANDARD FEATURES

### BrilliantColor™



BrilliantColor technology is setting a new standard in color performance. BrilliantColor offers color processing to enhance color performance for rich, vibrant and accurate colors.



### DLP® Technology



DLP technology was invented, developed and is owned by Texas Instruments. The DLP chip is a digital semiconductor that contains millions of microscopic mirrors. These projectors use DLP technology to project images with amazing quality.

### Easy Maintenance



Easy maintenance is another attractive function, as the lamp door is on top of the model.

### 3D Capable



Discover the teaching advantages of 3D! This DLP projector offers the latest trend for the classroom with 3D viewing. It will engage your students and can improve the learning process. 3D glasses and a special graphic card are required for 3D viewing and are not included with the projector.

### Wall Color Correction



This feature corrects the color of images projected on surfaces that are not white to prevent color differences between the source and projections. Five wall color modes include light yellow, light green, blue, black board and pink.

# CP-DX300 DLP® Projector

**HITACHI**  
Inspire the Next

## Enhance the educational experience with Hitachi's CP-DX300.

The CP-DX300 DLP® projector from Hitachi is specifically designed to enhance the educational experience — for students and teachers. Leading edge DLP® projector technology helps stimulate the imagination of students of all ages and makes lessons become more interesting, compelling and memorable. Vivid colors. Deeper blacks. Bold graphics. Crisp text.



The CP-DX300 does it all in classrooms of all sizes. With 3,000 ANSI lumens light output, XGA 1024 x 768 resolution, the CP-DX300 provides the perfect solution. It also features exceptional reliability, a high contrast ratio, HDMI terminals so you can connect many types of AV devices, and wall color correction which corrects the colors of images projected on surfaces that are not white. With Hitachi's CP-DX300, learning has never been easier, more enjoyable or so engaging.



Front 3/4 View



Top View




Left Side Profile



Right Side Profile

### Input/Outputs

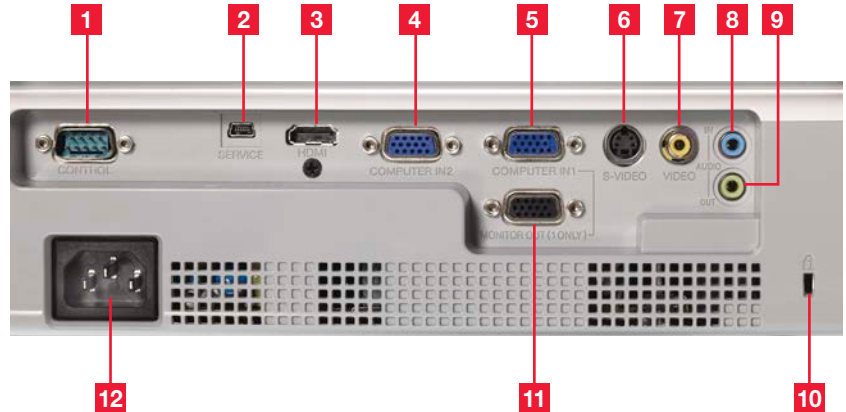

- |                      |                  |                          |
|----------------------|------------------|--------------------------|
| 1. Control (RS-232C) | 5. Computer in 1 | 9. Audio Out             |
| 2. Service           | 6. S-Video       | 10. Lock                 |
| 3. HDMI              | 7. Video         | 11. Monitor Out (1 only) |
| 4. Computer in 2     | 8. Audio In      | 12. AC In                |

**HDMI** HDMI

**CC** Closed Captioning



Hitachi Trade-Up Program



3 Year Warranty

HI0144-Rev.3-10/13  
All specifications subject to change without notice.  
DLP® and the DLP logo are registered trademarks of Texas Instruments.  
©2013 Hitachi America, Ltd. All Rights Reserved.

**Hitachi America, Ltd.**

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)  
Web: [hitachi-america.us/projectors](http://hitachi-america.us/projectors)

# CP-DX300



YouTube



Accessories	
<b>Supplied Accessories</b>	Remote control, power cord, computer cable, user's manual
<b>Optional Accessories</b>	MS-1 wired multifunction switcher, MS-1WL wireless multifunction switcher, LCDSCM2B soft sided case
Replacement Parts	
<b>Lamp</b>	DT01461
<b>Remote Control</b>	HL02961

**Projection Throw Chart (In inches)**

Screen Size 4:3		Throw Distance	
Diagonal	Width	Min	Max
30	24	45	50
60	48	89	99
80	64	119	131
100	80	149	164
150	120	223	246
300	240	446	491

Throw Ratio: (distance : width)  
1.86 - 2.04 : 1

## Specifications

Display	<b>Projection Technology</b>	0.55" single chip DLP
	<b>Resolution</b>	XGA - 1024 x 768
	<b>Light Output</b>	3,000 ANSI lumens
	<b>Colors</b>	1.07 billion colors
	<b>Aspect Ratio</b>	Native 4:3 / 16:9 compatible
	<b>Contrast Ratio</b>	2500 : 1
Lens & Operation	<b>Throw Ratio</b> (distance : width)	1.86 - 2.04 : 1
	<b>Focus Distance</b>	39" - 472"
	<b>Display Size</b>	30" - 300"
	<b>Lens</b>	F = 2.6 - 2.8, f = 21 - 23 mm, x 1.1 manual zoom
	<b>Lamp Wattage</b>	196W
	<b>Expected Lamp Life*</b>	Approximately 4,500 hours (standard mode) 6,000 hours (Eco mode)
Compatibility	<b>Speaker Output</b>	2W x 1
	<b>Acoustic Noise Level</b>	33 dB (29 dB in Eco mode)
	<b>Keystone</b>	+/- 30° vertical only
	<b>Computer</b>	VGA, SVGA, XGA, WXGA/WXGA+/SXGA/SXGA+/UXGA (compressed), MAC 16"
	<b>H-Sync</b>	31.5 kHz - 102 kHz
	<b>V-Sync</b>	59.9 Hz - 120 Hz
Connectors	<b>Composite Video</b>	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	<b>Component Video</b>	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	<b>HDMI</b>	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	<b>Digital Input</b>	HDMI x 1 (HDCP compliant)
	<b>Computer Input 1</b>	15-pin mini D-sub x 1
	<b>Computer Input 2</b>	15-pin mini D-sub x 1
	<b>Computer Monitor Output</b>	15-pin mini D-sub x 1 (computer in 1 only)
	<b>Video Input</b>	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	15-pin D-sub x 2 (shared with computer in 1/2)
	<b>Audio Input</b>	3.5 mm stereo mini jack x 1
<b>Audio Output</b>	3.5 mm stereo mini jack x 1	
<b>Network LAN Wired</b>	N/A	
<b>Network LAN Wireless</b>	N/A	
<b>USB</b>	N/A	
<b>Control Terminals</b>	9-pin D-sub x 1 (RS-232 control)	
Ratings & Warranty	<b>Power Supply</b>	AC100-120V / AC220-240V, 50/60Hz
	<b>Power Consumption</b>	250W
	<b>Operating Temperature</b>	32°F - 95°F (0°C - 35°C)
	<b>Dimensions (W x D x H)</b>	10.4" x 8.8" x 3.2" (excluding protruding parts)
	<b>Weight</b>	Approximately 4.8 lbs.
	<b>Approvals</b>	UL 60950-1 / cUL FCC Part 15 subpart B class B
<b>Warranty</b>	3 year limited parts and labor. Extended Service Contract available (additional cost)	

\* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

# CP-DX300

