

Product Specifications



THIS DOCUMENT CONTAINS SPECIFICATIONS FOR

ActivBoard

DESCRIPTION

The ActivBoard 500 Pro with Dual-User Pen and Touch capability is available in 78", 87" and 95" versions with integrated slim-line speakers and amplifier, ActivInspire Professional Edition, Promethean ActivOffice and Promethean Applications software.

SYSTEM OVERVIEW Installation The installation of this product should be completed by a Promethean Certified Installer. Please visit www.PrometheanWorld.com/ActivCare/installationtc. Components supplied and minimum specifications stated have been tested and are required for optimal performance. Use of components not supplied by Promethean or not meeting minimum specifications may impact performance and affect warranty. Contact your Promethean partner or visit www.PrometheanKB.com for more information For Promethean Warranty Information please visit: www.PrometheanWorld.com/ActivCare Warranty Online Support for all Promethean Products available from: www.PrometheanKB.com Support **UPGRADE AND ACCESSORY OPTIONS** Cable Wall Box Connectivity box with inputs for 2 x fully wired VGA (to support VESA DDC) plus 3.5mm stereo jack audio inputs, USB-B input (for ActivBoard), S-Video, composite video plus auxiliary audio jack inputs, Cat 5e Ethernet input. Allows additional flexibility during installation, where the computer is located further away from the System

in length; "left click", cursor and hover, just like a mouse



ActivWand 50

Wireless, battery-free and extended reach input device for the ActivBoard – 540mm (21.2in)




INTERACTIVE DISPLAY

TECHNICAL DRAWING

DIMENSION	P	4	E	3	()	[)	E	=	F	•	(}	H	1
BOARD SIZE	mm	in	mm	in	mm	in										
78"	1868	73,5	1329	52,3	1623	63,9	1175	46,3	2394	78,7	1567	61,7	1175	46,3	1958	77,1
87"	2105	82,9	1329	52,3	1865	73,4	1175	46,3	2196	86,5	1860	73,2	1162,5	45,8	2193	86,4
95"	2336	92,0	1329	52,3	2095	82,5	1175	46,3	2000	94,3	2089	82,2	1175	46,3	2392	94,1

A: BOARD WIDTH
B: BOARD HEIGHT
C: ACTIVE AREA WIDTH
D: ACTIVE AREA HEIGHT
E: ACTIVE AREA DIAGONAL
F: IMAGE AREA WIDTH
G: IMAGE AREA HEIGHT
H: IMAGE AREA DIAGONAL

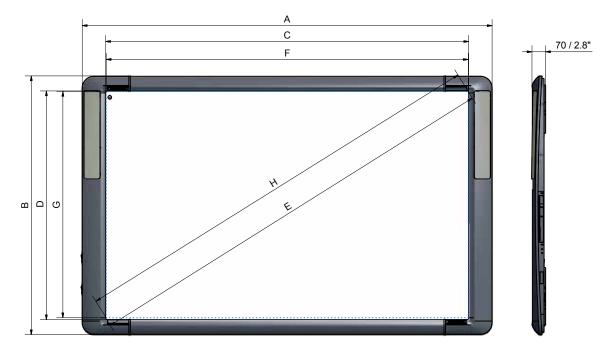





INTERACTIVE DISPLAY

ACTIVBOARD GENERAL SPECIFICATIONS

Model	ActivBoard 500 Pro Range					
Pen Internal Resolution	2730 points (lines) per inch					
Pen Output Resolution	200 points (lines) per inch					
Pen Tracking Rate	200 inches per second providing a fast response to pen commands					
Pen Output Rate	160 coordinate pairs per second (single user) 80 coordinate pairs per second (dual user)					
User Input	Cordless battery-free pen incorporating tip switch and side switch for full mouse functionality (ActivPen) and touch					
Touch Resolution	200 points (lines) per inch					
Touch Output Rate	80 coordinate pairs per second					
Touch Response Rate	10 ms					
Maximum Simultaneous Touches	2 with ActivInspire 4 with Windows 7					
Digitizing Technology	Passive Electromagnetic and Capacitive sensing interface					
Power Requirement	Mains Powered; 18V Power Supply Unit					
Connection to Computer	USB 2.0, 1 × 3m USB 2.0 data cable supplied					
Connection to Peripherals	2 × USB ports on left hand side					
Screen Surface	Low Glare Melamine					
Certifications	UL, CE, FCC					
Operating Temperature Range	0°C to +40°C (32°F to 104°F)					
Storage Temperature Range	-20°C to +60°C (-4°F to 140°F)					
Storage Humidity	10% to 90% (non-condensing)					
Dual User Functionality	Pen: 1 Instructor ActivPen and 1 Participant ActivPen can be used together in Dual-User Mode when using ActivInspire 1.5 Professional Edition and above Pen and Touch: 1 Participant ActivPen and simultaneous additional two-touch gesture supported when using ActivInspire 1.5 Professional Edition and above					
Single User Functionality	Pen: 1 Instructor ActivPen Touch: Two-touch gesture supported when using ActivInspire 1.5 Professional Edition and above					
Integrated USB Sound	Two integrated slim-line speakers and amplifier (with controls, inputs and outputs)					
Packed Contents List	ActivBoard 587 Pro or ActivBoard 595 Pro, 2 Instructor ActivPens, 2 Participant ActivPens, 1 AMP PSU, Wall Mounting Brackets, User Guide, Access to ActivInspire Professional Edition, Promethean ActivOffice and Promethean Applications via download. (ActivInspire Professional Edition is also available on DVD on request), 1 x 3m USB data cable					





INTERACTIVE DISPLAY

INTEGRATED USB SOUND SPECIFICATIONS

Amplifier Power Output	20W per channel RMS (<1% distortion)
Controls	Volume, Bass, Treble, on/off
Amplifier Frequency Response	40Hz to 18kHz +/-3dB (at 1W)
USB Sound	USB Sound supported for Minimum System Requirements stated
Connectivity – Inputs (4)	Stereo PC, Stereo CD/DVD, Mono Auxiliary, Microphone to PC
Connectivity – Outputs (2)	2 Stereo
Power Requirement	18V 5 Amp

ACTIVBOARD SPECIFICATIONS

Model	ActivBoard 578 Pro	ActivBoard 587 Pro	ActivBoard 595 Pro		
ActivBoard Size	78in	87in	95in		
Resolution	12800 x 9200	14600 x 9200	17200 x 9200		
Screen Formats	4:3	16:10	16:9		
Overall Dimensions	1868mm x 1329mm 973.5in x 52.3in)	2105mm x 1329mm (82.9in x 52.3in)	2336mm x 1329mm (92in x 52.3in)		
Active Area Dimensions	1628mm x 1175mm (64in x 46in)	1865mm x 1175mm (73.4in x 46.3in)	2095mm x 1175mm (82.5in x 46.3in)		
Active Area Diagonal	2000mm (78.7in)	2196mm (86.5in)	2394mm (94.3in)		
Actual Image Diagonal	1958mm (77.1in)	2193mm (86.4in)	2392mm (94.2in)		
Board Weight	37kg (81.6lb)	40kg (88lb)	48kg (106lb)		
Packed Weight	52kg (114.6lb)	57kg (126lb)	65kg (143lb)		
Packed Dimensions	2025mm × 1500mm × 110mm (79.9in × 59in × 4.3in)	2270mm × 1500mm × 110mm (89.4in × 59.1in × 4.3in)	2572 mm × 1495mm × 110mm (101.3in × 58.9in × 4.33in)		

MINIMUM COMPUTER REQUIREMENTS

Operating Systems	Windows XP SP3 and above (XP/Vista/7); Mac OSX 10.4.11 – 10.6.4 (Tiger/Leopard/Snow Leopard); Linux Ubuntu 9.10 or 10.04; Debian Lenny; Linex Colegios 2010; Linkat 3; ALT_Linux (Russia)					
PC	2.0 GHz Intel Core 2 Duo or faster for HD-quality videos, 1 GB of RAM is required to play HD-quality videos, 1024 x 768 resolution, 1.5 GB of Free Disk Space					
Mac	2.0 GHz Intel Core 2 Duo, 512 MB of RAM, 1024 x 768 resolution, 3.0 GB of Free Disk Space					
Linux	2.0 GHz Processor or faster for HD-quality videos, 1 GB of RAM is required to play HD-quality videos, 1024×768 resolution, 1.5 GB of Free Disk Space					

